

Multipair cable: 100 Ohm, 2x Aluminium shielded 24AWG twisted pairs
CVS LKMF02P Item code 1E00723


ELECTRICAL DATA		
D.C.R. at 20°C		≤ 94,2
Capacitance	Cond/Cond	72 ± 5 pF/m
	Cond/Sh	136 ± 5 pF/m
Nominal Impedance		102 ± 5 Ohm
Test Voltage		2500 Vac
Rated Voltage		300 Vac
GENERAL DATA		
Cable	O.D	8,6 ± 0.2 mm
	Bending radius	≥ 12 x O.D.
	Standard reels	500 m
	Operating temperature	- 20 ÷ 70 °C
Jacket	Material	Fire retardant flex PVC
	Nominal thickness	≥ 1.2 mm
Shield	Material	Al/PET tape on each pair
Conductor	Quantity	2 x (2 x 0.22 mm ²)
	Strand	7 x 0.203 mm
	Area/AWG	0.22 mm ² /AWG24
	Insul.O.D.	≥ 0.30 mm
	Material	Flexible electrolytic tinned copper conductor

Standard reference: 2014/35/EU, UL 1581.
Standard reference: IEC 60332-3-24 Cat.C,



Eurocable Srl is a Link company.

LINK S.r.l.

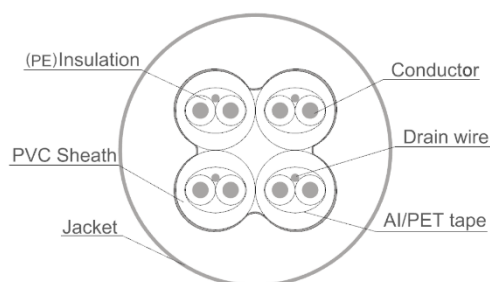

Multipair cable: 100 Ohm, 4x Aluminium shielded, 24AWG twisted pairs

Item code 1E00724

CVS LKMF04P

ELECTRICAL DATA

D.C.R. at 20°C		≤ 94.2
Capacitance	Cond/Cond	72 ± 5 pF/m
	Cond/Sh	136 ± 5 pF/m
Nominal Impedance		102 ± 5 Ohm
Test Voltage		2500 Vac
Rated Voltage		300 Vac

GENERAL DATA


Cable	O.D	10.3 ± 0.2 mm
	Bending radius	≥ 12 x O.D.
	Standard reels	500 m
	Operating temperature	- 20 ÷ 70 °C
Jacket	Material	Fire retardant flex PVC
	Nominal thickness	≥ 1.4 mm
Shield	Material	Al/PET tape on each pair
Conductor	Quantity	4 x (2 x 0.22 mm ²)
	Strand	7 x 0.203 mm
	Area/AWG	0.22 mm ² /AWG24
	Insul.O.D.	≥ 0.30 mm
	Material	Flexible electrolytic tinned copper conductor

Standard reference: 2014/35/EU, UL 1581.
Standard reference: IEC 60332-3-24 Cat.C,



Eurocable Srl is a Link company.

LINK S.r.l.

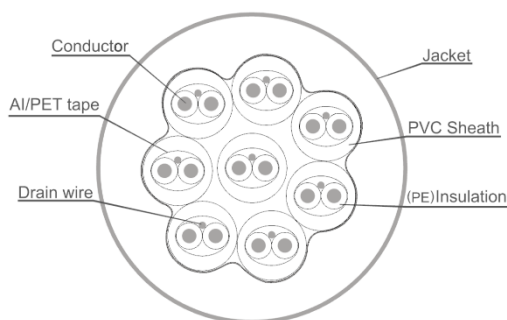


Multipair cable: 100 Ohm, 8x Aluminium shielded, 24AWG twisted pairs CVS LKMF08P			Item code 1E00725
ELECTRICAL DATA			
D.C.R. at 20°C		≤ 94.2	
Capacitance	Cond/Cond	72 ± 5 pF/m	
	Cond/Sh	136 ± 5 pF/m	
Nominal Impedance		102 ± 5 Ohm	
Test Voltage		2500 Vac	
Rated Voltage		300 Vac	
GENERAL DATA			
Cable	O.D	13.5 ± 0.3 mm	
	Bending radius	≥ 12 x O.D.	
	Standard reels	500 m	
	Operating temperature	- 20 ÷ 70 °C	
Jacket	Material	Fire retardant flex PVC	
	Nominal thickness	≥ 1.5 mm	
Shield	Material	Al/PET tape on each pair	
Conductor	Quantity	8 x (2 x 0.22 mm ²)	
	Strand	7 x 0.203 mm	
	Area/AWG	0.22 mm ² /AWG24	
	Insul.O.D.	≥ 0.30 mm	
	Material	Flexible electrolytic tinned copper conductor	

Standard reference: 2014/35/EU, UL 1581.
Standard reference: IEC 60332-3-24 Cat.C,



Eurocable Srl is a Link company.

LINK S.r.l.

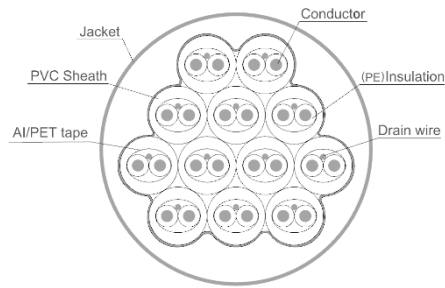

Multipair cable: 100 Ohm, 12x Aluminium shielded, 24AWG twisted pairs
CVS LKMF12P

Item code 1E00726

ELECTRICAL DATA		
D.C.R. at 20°C		≤ 94.2
Capacitance	Cond/Cond	72 ± 5 pF/m
	Cond/Sh	136 ± 5 pF/m
Nominal Impedance		102 ± 5 Ohm
Test Voltage		2500 Vac
Rated Voltage		300 Vac
GENERAL DATA		
Cable	O.D	16.0 ± 0.3 mm
	Bending radius	≥ 12 × O.D.
	Standard reels	500 m
	Operating temperature	- 20 ÷ 70 °C
Jacket	Material	Fire retardant flex PVC
	Nominal thickness	≥ 1.5 mm
Shield	Material	Al/PET tape on each pair
Conductor	Quantity	12 × (2 × 0.22 mm ²)
	Strand	7 × 0.203 mm
	Area/AWG	0.22 mm ² /AWG24
	Insul.O.D.	≥ 0.30 mm
	Material	Flexible electrolytic tinned copper conductor


Standard reference: 2014/35/EU, UL 1581.
Standard reference: IEC 60332-3-24 Cat.C,



Eurocable Srl is a Link company.

LINK S.r.l.

Via Bruno Pontecorvo, 10 - 00012 Guidonia Montecelio, Roma, Italy
Tel. +39 06 227251 | Fax. +39 22725225 | linkitaly.com | info@linkitaly.com

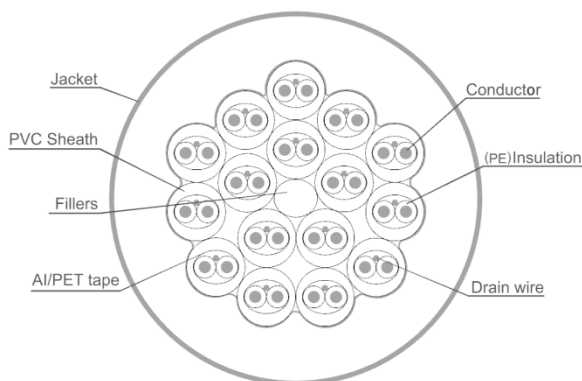

Multipair cable: 100 Ohm, 16x Aluminium shielded, 24AWG twisted pairs
CVS LKMF16P

Item code 1E00727

ELECTRICAL DATA

D.C.R. at 20°C		≤ 94.2
Capacitance	Cond/Cond	72 ± 5 pF/m
	Cond/Sh	136 ± 5 pF/m
Nominal Impedance		102 ± 5 Ohm
Test Voltage		2500 Vac
Rated Voltage		300 Vac

GENERAL DATA

Cable	O.D	18.0 ± 0.3 mm
	Bending radius	≥ 12 x O.D.
	Standard reels	500 m
	Operating temperature	- 20 ÷ 70 °C
Jacket	Material	Fire retardant flex PVC
	Nominal thickness	≥ 1.7 mm
Shield	Material	Al/PET tape on each pair
Conductor	Quantity	16 x (2 x 0.22 mm ²)
	Strand	7 x 0.203 mm
	Area/AWG	0.22 mm ² /AWG24
	Insul.O.D.	≥ 0.30 mm
	Material	Flexible electrolytic tinned copper conductor

Standard reference: 2014/35/EU, UL 1581.
Standard reference: IEC 60332-3-24 Cat.C,



Eurocable Srl is a Link company.

LINK S.r.l.